

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number
WO 2004/048293 A1

(51) International Patent Classification⁷: **C04B 40/00**,
24/32, 24/16

(JP). ALBRECHT, Gerhard [DE/DE]; Dr.-A.-Frank-Str.
32, 83308 Trostberg (DE).

(21) International Application Number:
PCT/EP2002/013328

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:
25 November 2002 (25.11.2002)

(25) Filing Language: English

(26) Publication Language: English

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **DIE
CONSTRUCTION RESEARCH & TECHNOLOGY
GMBH** [DE/DE]; Dr. Albert-Frank-Strasse 32, 83308
Trostberg (DE).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **LORENZ, Klaus**
[DE/JP]; 2722, Hagizono, Chigasaki-shi, Kanagawa 2722
(JP). **YAGUCHI, Minoru** [JP/JP]; 2722, Hagizono, Chi-
gasaki-shi, Kanagawa 2722 (JP). **SUGIYAMA, Tomomi**
[JP/JP]; 2722, Hagizono, Chigasaki-shi, Kanagawa 2722

Published:

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: DEFOAMING AGENT FOR CEMENTITIOUS COMPOSITION

(57) Abstract: A defoaming agent for cementitious compositions is provided, which has an excellent defoaming performance and does not segregate when mixed with a high performance AE water-reducing agent to form a single admixture or when diluted in water at the desired concentration, and which has excellent long term storage properties. The defoaming agent for cementitious compositions is obtained by mixing at least a polyethylene oxide derivative and a nonionic defoaming agent wherein the polyethylene oxide derivative has at one end a hydrophobic group with a branched structure and/or an unsaturated bond and at the other end an anionic group.

BEST AVAILABLE COPY

WO 2004/048293 A1

DEFOAMING AGENT FOR CEMENTITIOUS COMPOSITIONS

The present invention relates to a defoaming agent used for producing cementitious compositions such as concrete, mortar, cement paste and cement milk.

5

When polycarboxylate-type high performance air-entraining (AE) water-reducing agents are used in cementitious compositions such as concrete, mortar, cement paste and cement milk, they tend to entrain an unacceptably large amount of air. To overcome this, defoaming agents such as silicon, fatty acid ester and polyester types have commonly been used to control the amount of air within a desired range. However, since extremely small amounts of these defoaming agents have an intense defoaming effect, it has been preferred either to dissolve the defoaming agent in water at the desired concentration, or to combine the defoaming agent with the polycarboxylate-type high performance AE water-reducing agent in a one-pack admixture.

15 However, when such a defoaming agent is used as a one-pack admixture with a polycarboxylate-type high performance AE water-reducing agent, there is often the problem that the blending is not adequate out and segregation occurs. In order to avoid segregation, a stirring device has to be installed in the storage tank, which is both noisy and adds further costs. The problem of segregation also occurs when diluting such a defoaming agent in water to the desired concentration.

25

Japanese published Patent Application H07-53249 proposes a polycarboxylate-type high performance AE water-reducing agent that has been prepared with a specific polycarboxylate-type polymer to which a defoaming agent has been added during production.

However, since the amount of air in a cementitious composition varies depending on the material used and the ambient temperature, the amount of defoaming agent necessary for adjusting the right amount of air generally also changes. Thus, if the amount of defoaming agent mixed beforehand by this technique is not correct, there is the problem that the desired amount

of air cannot be obtained, which involves the complication of using a separate air adjusting agent to adjust the amount of air.

There is therefore a need for a defoaming agent for cement compositions, which has
5 excellent defoaming performance in cement compositions, and which does not segregate when combined in a one-pack admixture with a high performance AE water-reducing agent or when diluted in water at the desired concentration, and which has excellent long term storage properties.


10 The invention provides a defoaming agent for cementitious compositions, obtained by mixing at least one polyethylene oxide derivative and at least one nonionic defoaming agent, wherein the polyethylene oxide derivative has at one end a hydrophobic group with at least one of a branched structure and an unsaturated bond, and at the other end an anionic group.

15 The invention further relates to a method of defoaming a cementitious composition by the addition to the composition of a defoaming agent as hereinabove described.

The invention further relates to the abovementioned defoaming agent for cement compositions, wherein the unsaturated bond is a double bond.

20

The invention also relates to the abovementioned defoaming agent for cement compositions, wherein the polyethylene oxide derivative is a compound expressed by formula I:




25

wherein X is a hydrophobic group with at least one of a branched structure and an unsaturated bond; Y is an anion group; EO is $-\text{CH}_2\text{CH}_2\text{O}-$ and a is an integer from 6 to 100.

The invention further relates to the abovementioned defoaming agent for cement
30 compositions, wherein a is an integer from 15 to 60.


The invention also relates to the abovementioned defoaming agent for cement compositions, wherein the hydrophobic group with at least one of a branched structure and an unsaturated bond is expressed by formula II:

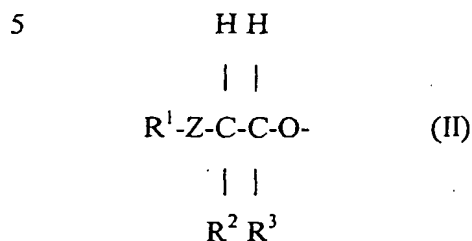

wherein Z is O or an amine; R^1 , R^2 and R^3 are each independently alkyl or phenyl, naphthyl, alkenyl, alkylene oxide with 2 to 4 carbon atoms or any derivatives thereof; R^2 and R^3 may also be each independently a hydrogen atom, with the proviso that R^1 is not alkyl when R^2 and R^3 are both hydrogen atoms.

The invention further relates to the abovementioned defoaming agent for cement compositions, wherein the anion group is $-\text{SO}_3\text{M}$, $-(\text{CH}_2\text{CH}_2)\text{OSO}_3\text{M}$, $-\text{R}^4\text{COOM}$ (wherein R^4 is $-\text{C}_m\text{H}_{2m}-$ (in which m is an integer $10 > m > 0$ and preferably 1 or 2) or a phenyl group), $-\text{PO}_3\text{M}$ or $-\text{CO}(\text{CH}_2)_n\text{COOM}$ (wherein M is Na salt, K salt, Ca salt, Mg salt, NH_4 salt or H, n is 2 or 3).

The invention also relates to the abovementioned defoaming agent for cement compositions, wherein the nonionic defoaming agent is expressed by formula III:



wherein R^5 and R^6 are each independently an aliphatic hydrocarbon with 10 to 25 carbon atoms, an alkyl group with 1 to 5 carbon atoms or H; AO is at least one of a block polymer and a random polymer made of alkylene oxide units with 2 to 3 carbon atoms, and b is an integer from 5 to 500.

The invention further relates to the abovementioned defoaming agent for cementitious compositions obtained by mixing the polyethylene oxide derivative and the nonionic defoaming agent at a ratio in the range of 20:80 to 60:40 (wt%).

- 5 The invention also relates to the abovementioned defoaming agent for cement compositions, wherein the nonionic defoaming agent, when converted to polyethylene glycol, has a weight average molecular weight in the range from 300 to 30,000 and the weight ratio of the ethylene oxide in said molecular weight is in the range from 5 to 80 %.
- 10 The polyethylene oxide derivatives used in the present invention have at one end a hydrophobic group with a branched structure and/or an unsaturated bond and at the other end an anionic group, and they can be mixed with commonly used nonionic defoaming agents known to the art without segregation to obtain defoaming agents with a high solution stability.
- 15 Moreover, the polyethylene oxide derivatives used in the present invention are expressed by formula (I):
- $$\text{X-(EO)}_a\text{-Y} \quad (\text{I})$$
- 20 wherein X is a hydrophobic group with at least one of a branched structure and an unsaturated bond; Y is an anion group and EO is $\text{-CH}_2\text{CH}_2\text{O-}$.


Even though the value for a is not particularly limited, an integer from 6 to 100 is preferred and an integer from 15 to 60 is especially preferred.

25

If the abovementioned hydrophobic group has an unsaturated bond, it is preferred that the unsaturated bond be a double bond.

- The hydrophobic group with a branched structure and/or an unsaturated bond at the end of polyethylene oxide derivatives used in the present invention is preferably a
- 30 hydrophobic group expressed by formula II:

5



5


In formula II, Z is O or an amine; R¹, R² and R³ are each independently alkyl or phenyl, naphthyl, alkenyl, alkylene oxide with 2 to 4 carbon atoms or any derivatives thereof. Further, R² and R³ may also be each independently a hydrogen atom, with the proviso that R¹ is not alkyl
 10 when R² and R³ are both hydrogen atoms.

Examples of the anionic group at the end of the polyethylene oxide derivatives used in the present invention include:

- SO₃M,
- 15 -(CH₂CH₂)OSO₃M,
- PO₃M,
- R⁴COOM (wherein R⁴ is -C_mH_{2m}- (in which m is an integer 10 > m > 0 and preferably 1 or 2) or a phenyl group),
- CO(CH₂)_nCOOM (wherein n is 2 or 3) and
- 20 - COCH=CHCOOM

In the formula given above, it is preferred that M be Na salt, K salt, Ca salt, Mg salt, NH₄ salt or H.

- 25 The nonionic defoaming agent used in the present invention may be any nonionic defoaming agent known to the art. However, particularly preferred are compounds of formula III:



30

wherein R⁵ and R⁶ are each independently an aliphatic hydrocarbon with 10 to 25 carbon atoms, an alkyl group with 1 to 5 carbon atoms or H; AO is a block polymer and/or a random polymer constituted of alkylene oxide with 2 to 3 carbon atoms, especially preferred are 2 carbon atoms, and b is an integer from 5 to 500.

5

Even though the ratio in which the polyethylene oxide derivative and the nonionic defoaming agent are mixed to obtain the defoaming agent for cement compositions of the present invention is not particularly limited, the preferred range is 10:90 to 70:30 (wt%), more preferably 20:80 to 60:40 (wt%) and most preferably 20:80 to 50:50 (wt%).

10

The weight-average molecular weight of the nonionic defoaming agent used in the present invention is not particularly limited, however, when converted to polyethylene glycol, it is preferably in the range of 300 to 30,000, and the weight ratio of the ethylene oxide in the molecular weight of the nonionic defoaming agent is preferably in the range of 10 to 90 % and more preferably in the range of 5 to 80 %.

One of the major advantages of the defoaming agents of the present invention is that they can be combined with in a one-pack liquid composition, ready for addition to a cementitious composition. The invention therefore provides a water-reducing composition comprising a blend of a polycarboxylate-type high performance air-entraining (AE) water-reducing agent and a defoaming agent as hereinabove described.

The defoaming agent for cement compositions of the present invention can also be combined in a liquid composition together with one or more commonly-used water-reducing agents selected from among lignosulfonate salts, polycarboxylate salts and polysaccharide derivatives.

Even though the amount of defoaming agent for cement compositions of the present invention can be determined as needed, basically it is the amount necessary for adjusting the desired amount of air in a cement composition; an amount in the range of 0.001 to 5 wt%

calculated as solids by weight of cement is preferred, and an amount in the range of 0.01 to 0.5 wt% is especially preferred.

The defoaming agent for cement compositions of the present invention may also include
5 other known additives as required. Examples of other additives include conventional air-entraining agents, drying shrinkage reducing agents, accelerators, retarders, foaming agents, defoaming agents, rust preventing agents, quick-setting agents, thickeners and water-soluble high polymeric substances.

10 The invention is now further described with reference to the following, non-limiting examples.

EXAMPLES

15 PRODUCTION EXAMPLE 1 (Production of the polyethylene oxide derivative A-1)

13.42 wt. parts of cinnamyl alcohol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 11.41 wt. parts of allyl glycidyl ether were slowly added dropwise, whereupon the resulting mixture was reacted for 1 hour at 120 °C. 88.0 wt. parts of ethylene oxide were further added and a thick light yellow liquid was obtained after the resulting
20 mixture had been ethoxylated for 2 hours at 120 °C. The thick light yellow liquid obtained was transferred to a three-neck flask for sulfation by a commonly-used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-1 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

25 PRODUCTION EXAMPLE 2 (Production of the polyethylene oxide derivative A-2)

14.4 wt. parts of 2-naphthol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 11.41 wt. parts of allyl glycidyl ether were slowly added dropwise, whereupon the resulting mixture was reacted for 1 hour at 120 °C. 88.0 wt. parts of ethylene oxide were further added and a thick light yellow liquid was obtained after the resulting mixture
30 had been ethoxylated for 2 hours at 120 °C. The thick light yellow liquid obtained was

transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-2 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

5 PRODUCTION EXAMPLE 3 (Production of the polyethylene oxide derivative A-3)

22.04 wt. parts of 4-nonylphenol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 11.41 wt. parts of allyl glycidyl ether were slowly added dropwise, whereupon the resulting mixture was reacted for 1 hour at 120 °C. 88.0 wt. parts of ethylene oxide were further added and a thick light yellow liquid was obtained after the resulting mixture
10 had been ethoxylated for 2 hours at 120 °C. The thick light yellow liquid obtained was transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-3 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

15 PRODUCTION EXAMPLE 4 (Production of the polyethylene oxide derivative A-4)

22.04 wt. parts of 4-nonylphenol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 11.41 wt. parts of allyl glycidyl ether were slowly added dropwise, whereupon the resulting mixture was reacted for 1 hour at 120 °C. 44.0 wt. parts of ethylene oxide were further added and a thick light yellow liquid was obtained after the resulting mixture
20 had been ethoxylated for 2 hours at 120 °C. The thick light yellow liquid obtained was transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-4 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

25 PRODUCTION EXAMPLE 5 (Production of the polyethylene oxide derivative A-5)

22.04 wt. parts of 4-nonylphenol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 11.41 wt. parts of allyl glycidyl ether were slowly added dropwise, whereupon the resulting mixture was reacted for 1 hour at 120 °C. 88.0 wt. parts of ethylene oxide were further added and a thick light yellow liquid was obtained after the resulting mixture
30 had been ethoxylated for 2 hours at 120 °C. The thick light yellow liquid obtained was

transferred to a three-neck flask for sulfation by a commonly used sulfation method, 13.0 wt. parts of succinic anhydride and 0.1 wt. parts of trimethylamine were added in a nitrogen atmosphere and the polyethylene oxide derivative A-5 was obtained by carboxylating the resulting mixture for 2 hours at 50 °C.

5

PRODUCTION EXAMPLE 6 (Production of the polyethylene oxide derivative A-6)

5.81 wt. parts of allyl alcohol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 12.0 wt. parts of styrene alcohol were slowly added dropwise, whereupon the resulting mixture was reacted for 1 hour at 120 °C. 88.0 wt. parts of ethylene
10 oxide were further added and a thick light yellow liquid was obtained after the resulting mixture had been ethoxylated for 2 hours at 120 °C. The thick light yellow liquid obtained was transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-6 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

15

PRODUCTION EXAMPLE 7 (Production of the polyethylene oxide derivative A-7)

5.81 wt. parts of allyl alcohol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 19.6 wt. parts of stilbene oxide were slowly added dropwise, whereupon the resulting mixture was reacted for 1 hour at 120 °C. 110.0 wt. parts of ethylene
20 oxide were further added and a thick light yellow liquid was obtained after the resulting mixture had been ethoxylated for 2 hours at 120 °C. The thick light yellow liquid obtained was transferred to a three-neck flask for phosphorilation by a commonly used method, 16.0 wt. parts of phosphorous trichloride oxide were added in a nitrogen atmosphere and the polyethylene oxide derivative A-7 was obtained by reacting the resulting mixture at 45 °C.

25

PRODUCTION EXAMPLE 8 (Production of the polyethylene oxide derivative A-8)

13.42 wt. parts of 2-allylphenol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 11.41 wt. parts of allylglycidylether were slowly added dropwise, whereupon the resulting mixture was reacted for 1 hour at 120 °C. 88.0 wt. parts of ethylene
30 oxide were further added and a thick light yellow liquid was obtained after the resulting mixture

had been ethoxylated for 2 hours at 120 °C and a pressure of 5 atm. The thick light yellow liquid obtained was transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-8 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

5

PRODUCTION EXAMPLE 9 (Production of the polyethylene oxide derivative A-9)

26.1 wt. parts of 4-nonyl-2-propenylphenol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 88.0 wt. parts of ethylene oxide were added and a thick light yellow liquid was obtained after the resulting mixture had been ethoxylated for 2 hours at
10 120 °C and a pressure of 5 atm. The thick light yellow liquid obtained was transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-9 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

15 PRODUCTION EXAMPLE 10 (Production of the polyethylene oxide derivative A-10)

26.1 wt. parts of 4-nonyl-2-propenylphenol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 220.0 wt. parts of ethylene oxide were added and a thick light yellow liquid was obtained after the resulting mixture had been ethoxylated for 2 hours at 120 °C and a pressure of atm. The thick light yellow liquid obtained was transferred to a three-
20 neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-10 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

PRODUCTION EXAMPLE 11 (Production of the polyethylene oxide derivative A-11)

25 22.04 wt. parts of 4-nonylphenol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 11.41 wt. parts of allylglycidylether were slowly added dropwise, whereupon the resulting mixture was reacted for 1 hour at 120 °C. 88.0 wt. parts of ethylene oxide were further added and a thick light yellow liquid was obtained after the resulting mixture had been ethoxylated for 2 hours at 120 °C. The thick light yellow liquid obtained was
30 transferred to a three-neck flask for methylation, 10.7 wt. parts of dimethyl sulfate were added

and the polyethylene oxide derivative A-11 was obtained by reacting the resulting mixture for 3 hours at 80 °C.

PRODUCTION EXAMPLE 12 (Production of the polyethylene oxide derivative A-12)

5 22.04 wt. parts of 4-nonylphenol, 88 wt. parts of ethylene oxide and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor and a thick light yellow liquid was obtained by ethoxylating the resulting mixture for 1 hour at 120 °C. The thick light yellow liquid obtained was transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-12
10 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

PRODUCTION EXAMPLE 13 (Production of the polyethylene oxide derivative A-13)

5.81 wt. parts of allyl alcohol and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor, 12.02 wt. parts of styrene oxide were gradually added dropwise,
15 whereupon the resulting mixture was reacted for 1 hour at 140 °C. 22.0 wt. parts of ethylene oxide were further added and a thick light yellow liquid was obtained by ethoxylating the resulting mixture for 2 hours at 120 °C. The thick light yellow liquid obtained was transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-13 was obtained by sulfating the
20 resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.


PRODUCTION EXAMPLE 14 (Production of the polyethylene oxide derivative A-14)

24.2 wt. parts of cetyl alcohol, 0.05 wt. parts of potassium hydroxide and 44 wt. parts of ethylene oxide were charged into an autoclave reactor and a thick light yellow liquid was
25 obtained by ethoxylating the resulting mixture for 2 hours at 120 °C. The thick light yellow liquid obtained was transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the polyethylene oxide derivative A-14 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

PRODUCTION EXAMPLE 15 (Production of the polyethylene oxide derivative A-15)

26.1 wt. parts of 4-nonyl-2-propenylphenol, 484 wt. parts of ethylene oxide and 0.05 wt. parts of potassium hydroxide were charged into an autoclave reactor and a colorless solid substance was obtained by ethoxylating the resulting mixture for 1 hour at 150 °C. The
 5 colorless solid substance obtained was transferred to a three-neck flask for sulfation by a commonly used sulfation method, 10.7 wt. parts of amide sulfate were added and the thick light yellow liquid polyethylene oxide derivative A-15 was obtained by sulfating the resulting mixture in a nitrogen atmosphere for 2 hours at 125 °C.

10 The polyethylene oxide derivatives A-1 to A-15 obtained according to the Production Examples 1 to 15 are expressed by formula IV:

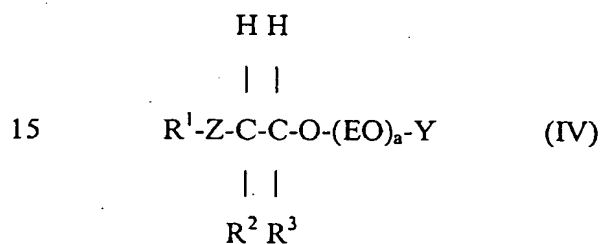

wherein the function groups are as shown in Table 1.

20

Table 1: The function groups of the polyethylene oxide derivatives A-1 to A15

Compound	R ¹	Z	R ²	R ³	a	Y
A-1	phenyl- CH=CHCH ₂ O-	O	H	CH ₂ =CH-CH ₂ - O-CH ₂ -	20	-SO ₃ NH ₄ ⁺
A-2	naphthyl-	O	H	CH ₂ =CH-CH ₂ - O-CH ₂ -	20	-SO ₃ NH ₄ ⁺
A-3	4-nonylphenyl-	O	H	CH ₂ =CH-CH ₂ - O-CH ₂ -	20	-SO ₃ NH ₄ ⁺
A-4	4-nonylphenyl-	O	H	CH ₂ =CH-CH ₂ - O-CH ₂ -	10	-SO ₃ NH ₄ ⁺
A-5	4-nonylphenyl-	O	H	CH ₂ =CH-CH ₂ - O-CH ₂ -	20	-COCH ₂ CH ₂ - COONa ⁺
A-6	CH ₂ =CH-CH ₂ -	O	H	phenyl	20	-SO ₃ NH ₄ ⁺
A-7	CH ₂ =CH-CH ₂ -	O	phenyl	phenyl	25	-PO ₃ ²⁻ (Na ⁺) ₂
A-8	2-allylphenyl-	O	H	CH ₂ =CH-CH ₂ - O-CH ₂ -	20	-SO ₃ NH ₄ ⁺
A-9	4-nonyl-2- propenyl-phenyl-	O	H	H	20	-SO ₃ NH ₄ ⁺
A-10	4-nonyl-2- propenyl-phenyl-	O	H	H	50	-SO ₃ NH ₄ ⁺
A-11	4-nonylphenyl-	O	H	CH ₂ =CH-CH ₂ - O-CH ₂ -	20	-CH ₃
A-12	4-nonylphenyl-	O	H	H	20	-SO ₃ NH ₄ ⁺
A-13	CH ₂ =CH-CH ₂ -	O	H	phenyl	5	-SO ₃ NH ₄ ⁺
A-14	C ₁₆ H ₃₃ (straight chain)	O	H	H	10	-SO ₃ NH ₄ ⁺
A-15	4-nonyl-2- propenyl-phenyl-	O	H	H	11 0	-SO ₃ NH ₄ ⁺

1. Blending and mixing of concrete

5 Concrete with a target slump of 18 ± 1 cm was prepared according to the mixing ratio given in Table 2.

The respective materials were weighed so as to result in a mixed amount of 80 liters, the materials were then charged into a 100 liter pan-type forced mixer and mixed for 120 seconds; the amount of air in the concrete thus prepared was then measured and the performance of the

10 defoaming agent was evaluated based on the variation in the amount of air.

Table 2: Concrete mixing ratio

Water/cement ratio (%)	Fine aggregate ratio (%)	Unit (kg/m ³)				
		Mixing water	Cement	Fine aggregate	Coarse aggregate	Admixture
50.0	49.0	165	320	878	931	3.2

As admixture, only a polycarboxylate-type water-reducing agent that had been mixed
 5 with a defoaming agent for cement compositions at a ratio of 2 g of defoaming agent for cement
 compositions for 1000 g of polycarboxylate-type water-reducing agent was used.

(Materials used)

- Cement: Normal Portland cement with a density of 3.16 produced by
 10 Taiheiyo Cement Corporation
- Fine aggregate: Oigawa river sand with a density of 2.59
- Coarse aggregate: Crushed stones from Ome with a density of 2.65
- Admixture: Polycarboxylate type water-reducing agent
- P-1: RHEOBUILD(trade mark) SP8SE of NMB Co., Ltd.
 15 P-2: RHEOBUILD SP8RE of NMB Co., Ltd.
- Nonionic defoaming agent: B-1: PLURONIC(trade mark) type L-61 of BASF
 B-2: PLONAL(trade mark) 753 of Toho Chemical Industry Co.,
 Ltd.
 B-3: SN Defoamer 170 of Sannopco Co., Ltd.

20

(Solution stability)

In order to confirm the solution stability of the defoaming agent for cement compositions
 according to the present invention, 2.0 g of defoaming agent for cement compositions was
 dissolved in 1000 g of carboxylate-type water-reducing agent and left standing for 3 months in
 25 an environment at room temperature, after which the segregation of a solution was observed.

The result was evaluated according to the following criteria:

15

- A⁺: very good (absolutely no segregation)
- A: good (almost no segregation)
- B: segregation

5 (Defoaming performance)

In order to confirm the defoaming performance of the defoaming agents for cement compositions according to the present invention, concrete was prepared as shown below; the defoaming performance was evaluated by comparing the amount of air in the concrete for cases in which a defoaming agent for cement compositions was used with that for cases in which no such agent was used.

- A: good defoaming performance (the amount of air was reduced by 2 % or more)
- B: no defoaming (the reduction in the amount of air was less than 2 % or the amount of air increased)

15

The results are shown in Table 3.

20

Table 3: Test results

Example	Defoaming agent for cement compositions				Polycarboxyate water-reducing agent	Solution stability	Amount of air	Defoaming performance
	Polyethylene glycol derivative		Nonionic defoaming agent					
	Type	Mixing ratio (%)	Type	Mixing ratio (%)				
1	A-1	30	B-1	70	P-1	A	2.0	A
2	A-1	50		50	P-1	A	1.9	A
3	A-1	90		10	P-1	A	2.1	A
4	A-2	50		50	P-1	A	2.0	A
5	A-3	50		50	P-1	A ⁺	1.8	A
6	A-4	50		50	P-1	A	1.6	A
7	A-5	50		50	P-1	A	1.8	A
8	A-6	50		50	P-1	A	2.0	A
9	A-7	50		50	P-1	A	1.9	A
10	A-8	50		50	P-1	A	1.9	A
11	A-9	50		50	P-1	A ⁺	1.8	A
12	A-10	50		50	P-1	A	1.8	A
13	A-1	50	B-2	50	P-1	A	1.7	A
14	A-1	50	B-3	50	P-1	A	2.0	A
15	A-1	50	B-1	50	P-2	A	1.8	A
Com- parative Example								
1	-	-	-	-	P-1	-	4.8	-
2	-	-	B-1	100	P-1	B	2.1	A
3	A-11	50		50	P-1	B	2.0	A
4	A-12				P-1	B	1.8	A
5	A-13				P-1	B	1.8	A
6	A-14				P-1	B	1.9	A
7	A-15				P-1	B	2.0	A

From Table 3 it is clear that, compared to Comparative Examples 1-7 in which no defoaming agent for cement compositions according to the present invention was used, Examples 1-12 in which defoaming agents for cement compositions were used, which had been prepared from different types of polyethylene glycol derivatives at different mixing ratios, and Examples 13-15 in which a defoaming agent for cement compositions was used with different


nonionic defoaming agents all showed excellent solution stability without segregation and a sufficient degree of defoaming performance.

No defoaming performance was obtained in Comparative Example 1 in which no
5 defoaming agent was used. In Comparative Examples 2-7, even though the defoaming agents for cement compositions mixed with polyethylene glycol derivatives showed adequate defoaming performance, segregation occurred and the solution stability was not adequate.

Comparison of the Examples with the Comparative Examples confirms that an overall
10 improvement in solution stability and defoaming performance etc. is obtained by using a defoaming agent for cement compositions according to the present invention.


Claims:

1. A defoaming agent for cementitious compositions, obtained by mixing at least one polyethylene oxide derivative and at least one nonionic defoaming agent, wherein the polyethylene oxide derivative has at one end a hydrophobic group with at least one of a
5 branched structure and an unsaturated bond, and at the other end an anionic group.
2. The defoaming agent according to claim 1, wherein the unsaturated bond is a double bond.
3. The defoaming agent according to claim 1 or claim 2, wherein the polyethylene oxide
10 derivative is a compound expressed by formula I:



wherein X is a hydrophobic group comprising at least one of a branched structure and an
15 unsaturated bond; Y is an anion group; EO is $-\text{CH}_2\text{CH}_2\text{O}-$ and a is an integer from 6 to 100.

4. The defoaming agent according to claim 3 wherein a is an integer from 15 to 60.
5. The defoaming agent according to any one of claims 1 to 4, wherein the hydrophobic group
20 comprising at least one of a branched structure and an unsaturated bond is expressed by formula II:



wherein Z is O or an amine; R^1 , R^2 and R^3 are each independently alkyl or phenyl, naphthyl, alkenyl, alkylene oxide with 2 to 4 carbon atoms or any derivatives thereof, and R^2 and R^3 may
30 also be each independently H, with the proviso that R^1 is not alkyl when R^2 and R^3 are both H.


BEST AVAILABLE COPY

CONFIRMATION COPY

6. The defoaming agent according to any one of claims 1 to 5, wherein the anion group is -SO₃M, -(CH₂CH₂)OSO₃M, -R⁴COOM (wherein R⁴ is -C_mH_{2m}- (in which m is an integer 10 > m > 0 and preferably 1 or 2) or a phenyl group), -PO₃M or -CO(CH₂)_nCOOM (wherein M is Na salt, K salt, Ca salt, Mg salt, NH₄ salt or H, n is 2 or 3).

5

7. The defoaming agent according to any of the claims 1 to 6 wherein the nonionic defoaming agent is expressed by formula III:



10

wherein R⁵ and R⁶ are each independently an aliphatic hydrocarbon with 10 to 25 carbon atoms, an alkyl group with 1 to 5 carbon atoms or H; AO is a block polymer and/or a random polymer constituted of alkylene oxide with 2 to 3 carbon atoms and b is an integer from 5 to 500.

15 8. The defoaming agent according to any one of claims 1 to 7 obtained by mixing the polyethylene oxide derivative and the nonionic defoaming agent at a ratio in the range of 20:80 to 60:40 (wt%).

9. The defoaming agent according to claim 7, wherein the nonionic defoaming agent, when
20 converted to polyethylene glycol, has a weight average molecular weight in the range from 300 to 30,000 and the weight ratio of the ethylene oxide in said molecular weight is in the range of 5 to 80 %.

10. A water-reducing composition comprising a blend of a polycarboxylate-type high
25 performance air-entraining (AE) water-reducing agent and a defoaming agent according to any one of claims 1-9.

11. A method of defoaming a cementitious composition by the addition to the composition of a defoaming agent according to any one of claims 1-9.

30

BEST AVAILABLE COPY

CONFIRMATION COPY

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 02/13328

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C04B40/00 C04B24/32 C04B24/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 42162 A (MBT HOLDING AG) 14 June 2001 (2001-06-14) page 13, line 14 - line 26 claims 1-3	1, 2, 10
X	EP 0 640 384 A (STEPAN CO) 1 March 1995 (1995-03-01) claim 1	1, 2, 5
A	US 5 661 206 A (TANAKA YOSHIO ET AL) 26 August 1997 (1997-08-26) the whole document	1-11

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

11 June 2003

Date of mailing of the international search report

24/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Pollio, M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/13328

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0142162	A	14-06-2001	AU 2005801 A	18-06-2001
			CA 2393625 A1	14-06-2001
			WO 0142162 A1	14-06-2001
			EP 1242330 A1	25-09-2002
			JP 2003516301 T	13-05-2003
			US 2002107310 A1	08-08-2002
EP 0640384	A	01-03-1995	US 5466393 A	14-11-1995
			AT 204208 T	15-09-2001
			DE 69330602 D1	20-09-2001
			DE 69330602 T2	04-07-2002
			EP 0640384 A1	01-03-1995
			ES 2161708 T3	16-12-2001
US 5661206	A	26-08-1997	AU 678458 B2	29-05-1997
			AU 6465794 A	15-12-1994
			CA 2125521 A1	12-12-1994
			CH 689118 A5	15-10-1998
			DE 4420444 A1	30-03-1995
			FR 2706447 A1	23-12-1994
			GB 2280180 A ,B	25-01-1995
			IT RM940369 A1	12-12-1994
			JP 3180864 B2	25-06-2001
			JP 7053249 A	28-02-1995
			SG 52673 A1	28-09-1998

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.